

POWERPACK SE SERIES

10-15-20 kVA

3:1
PHASE

ONLINE UPS



HOME/OFFICE



EMERGENCY



MEDICAL



INDUSTRY



DATA CENTER



TRANSPORT



UPS ONLINE



TOWER



POWER FACTOR



SERVICE



FEATURES


- High Frequency and True Double-Conversion
- DSP (Digital Signal Processors) Technology
- Input Power Factor Correction (PFC)
- Wide Input Voltage Range (110~300V)
- Output Power Factor 0.9
- Optimized Battery Configuration: 192V / 240V
- Cold Start
- Auto Sensing Frequency
- ECO Mode Operation for Energy Saving
- 50Hz/60Hz Frequency Conversion Mode
- Selectable Output Voltage via LCD
- Selectable Battery Shutdown Voltage (Eod) via LCD
- Selectable Input Mode via LCD (3:1 or 1:1)
- Power-On Self Test
- Advanced Battery Management (ABM)
- Short Circuit and Overload Protection
- Automatically Charging in Off Mode
- Fan Speed Auto Control when Load Temperature Varies
- Standard RS232/USB Communication Port
- Standard Emergency Power Off (EPO)
- RS485/SNMP/AS400 Communication Port (Optional)
- Extension Battery Bank (Optional)
- Manual Bypass
- N+X Redundancy Parallel (Optional)

CERTIFICATES




DETAILS

- | | | |
|-------------|----------|-----------------------------|
| 1. AC Input | 5. Fan | 9. Parallel Card (Optional) |
| 2. DC Input | 6. EPO | 10. SNMP/AS400 (Optional) |
| 3. Outlet | 7. RS232 | 11. Manual Bypass |
| 4. Breaker | 8. USB | 12. BAT_NTC (Optional) |

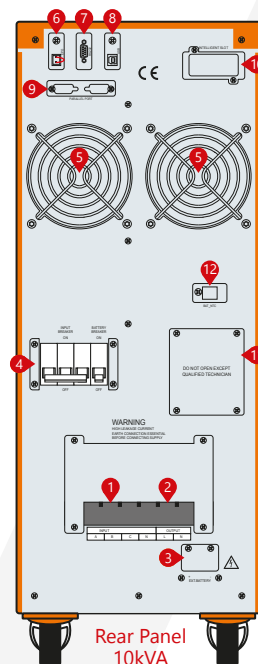

Rear Panel
10kVA

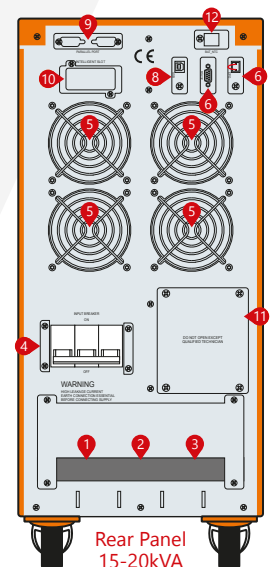

Rear Panel
15-20kVA

MODEL				
Power Watt		10kVA / 9kW	15kVA / 13.5kW	20kVA / 18kW
INPUT				
Related Voltage		3 : 1 : 360V / 380V / 400V / 415 VAC 1 : 1 : 208V / 220V / 230V / 240 VAC (Settable via LCD)		
Voltage Range		3 : 1 : Half Load (190 ~ 520) ±5 VAC, Full Load (277 ~ 520) ±5 VAC		
Frequency		40 ~ 70 Hz (Auto Sensing)		
Power Factor		3 : 1 ≥ 0.95; 1 : 1 ≥ 0.99		
BYPASS				
Voltage Range		160V Rated Output Voltage +32V		
Frequency		50 / 60 Hz ±5 Hz		
OUTPUT				
Voltage Range		208V / 220V / 230V / 240 VAC (Settable via LCD)		
Voltage Regulation		±1%		
Frequency		Synchronized with Utility in Mains Mode; 50 / 60 ±0.2 Hz in Battery Mode		
Waveform		Sinusoidal		
Crest Factor		3:1		
Harmonic Distortion		≤2% (Linear Load); ≤5% (Non-Linear Load)		
Transfer Time		0 ms		
Overload Capability		105% ~ 125%: Transfer to Bypass in 3min 125% ~ 150%: Transfer to Bypass in 30sec >150%: Transfer to Bypass in 1sec		
EFFICIENCY				
Mains Mode		≥92%		
Battery Mode		≥91%		
ECO Mode		≥98%		
BATTERIES				
DC Voltage		192 VDC / 240 VDC		
Inbuilt Battery		20 x 7Ah (16 Opt.)	20 x 9Ah (16 Opt.)	20 x 9Ah (16 Opt.)
Charge Current	Standard Model	1A		
	Long Time Model	1A / 3.5A / 7A		
Recharge Time		8 hour		
ALARMS				
Utility Failure		Beep / 4sec		
Low Battery		Beep / 1sec		
Overload		Beep Twice / 1sec		
UPS Fault		Long Beep		
MANAGEMENT				
RS232 (Standard)/USB(Optional)		Supports Windows®98/2000/2003/XP/Vista/2008/Windows®7/8/10		
SNMP (Optional)		Power Management from SNMP Manager and Web Browser		
ENVIRONMENT				
Humidity		20-90% RH @ 0-40°C (Non-Condensing)		
Noise Level		≤55 dB (1m)	≤60 dB (1m)	
DIMENSIONS & WEIGHT				
Dimension WxDxH (mm)		262 x 580 x 732 (S)	262 x 580 x 628 (H)	
Packaging Dimension WxDxH (mm)		359 x 687 x 937 (S)	359 x 687 x 832 (H)	
Net Weight (kg)		25.5 (H), 74.0 (S)	38.5 (H)	39.0 (H)
Gross Weight (kg)		29.0 (H), 83.5 (S)	47.0 (H)	47.5 (H)

• (S) means standard model, (H) means long time model.
Makelsan reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Makelsan products previously or subsequently sold.
Makelsan does not guarantee the items of the accuracy and completeness.